


I KÜRESEL VANA I 3 YOLLU T TİP VANA

I BALL VALVES I 3 WAY T PORT VALVES

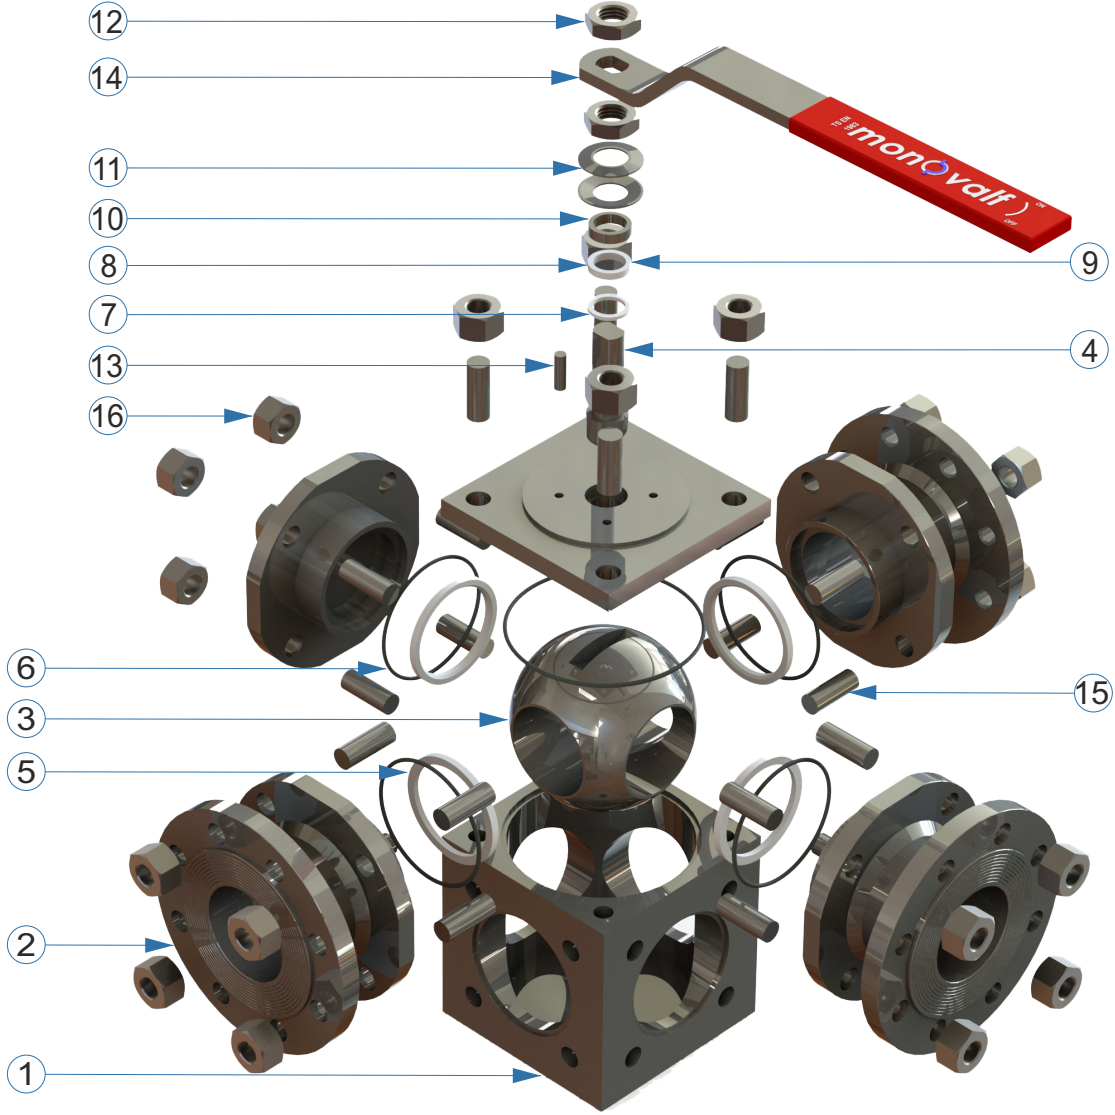




3 YOLLU - T KÜRESEL VANALAR / 3 WAY - T BALL VALVES

STANDART MALZEMELER / STANDARD MATERIALS

NO	PARÇA	PART	KARBON ÇELİK	CARBON STEEL	PASLANMAZ ÇELİK (1.4301)	STAINLESS STEEL (AISI 304)	PASLANMAZ ÇELİK (1.4401)	STAINLESS STEEL (AISI 316)
1	GÖVDE	BODY	ASTM A 105		1.4301	AISI 304	1.4401	AISI 316
2	KAPAK	CLOSURE	ASTM A 105		1.4301	AISI 304	1.4401	AISI 316
3	KÜRE	BALL	AISI 430		1.4301	AISI 304	1.4401	AISI 316
4	MİL	STEM	AISI 420		1.4301	AISI 304	1.4401	AISI 316
5	CONTA	SEAT	P.T.F.E.		P.T.F.E.		P.T.F.E.	
6	GÖVDE O RİNG	BODY O RING	VİTON		VİTON		VİTON	
7	MİL CONTASI	STEM SEAT	P.T.F.E.		P.T.F.E.		P.T.F.E.	
8	MİL O RİNG	STEM O RING	VİTON		VİTON		VİTON	
9	RONDELA	WASHER	P.T.F.E.		P.T.F.E.		P.T.F.E.	
10	BASKI RİNGİ	GLAND	AISI 420		1.4301	AISI 304	1.4301	AISI 304
11	ÇANAK PUL	SPRING WASHER	50CRV4		1.4301	AISI 304	1.4301	AISI 304
12	SOMUN	NUT	8..8		A2 - 70	AISI 304	A2 - 70	AISI 304
13	TAHTİT	STOP DEVICE	8..8		A2 - 70	AISI 304	A2 - 70	AISI 304
14	KOL	HANDLE	ST 37-2		1.4301	AISI 304	1.4301	AISI 304
15	SAPLAMA	STUD	8..8		A2 - 70	AISI 304	A2 - 70	AISI 304
16	SOMUN	NUT	8..8		A2 - 70	AISI 304	A2 - 70	AISI 304

Monovalf standartlar içerisinde kalarak tasarım ve malzeme değiştirme hakkına sahiptir.

ISO 5211

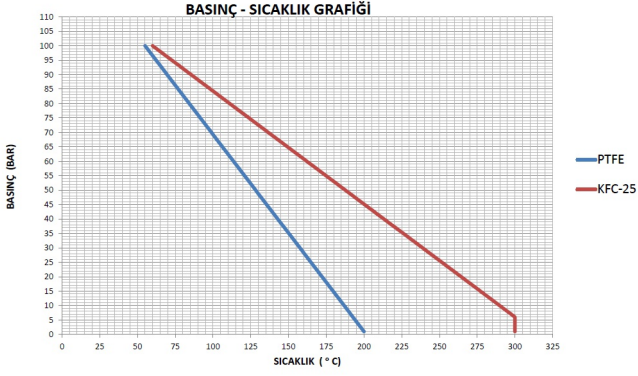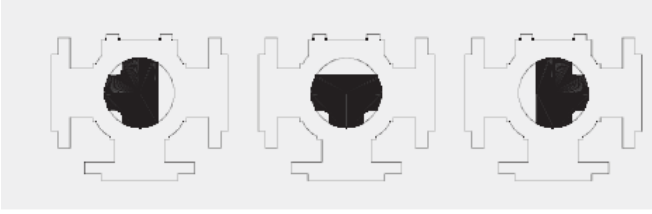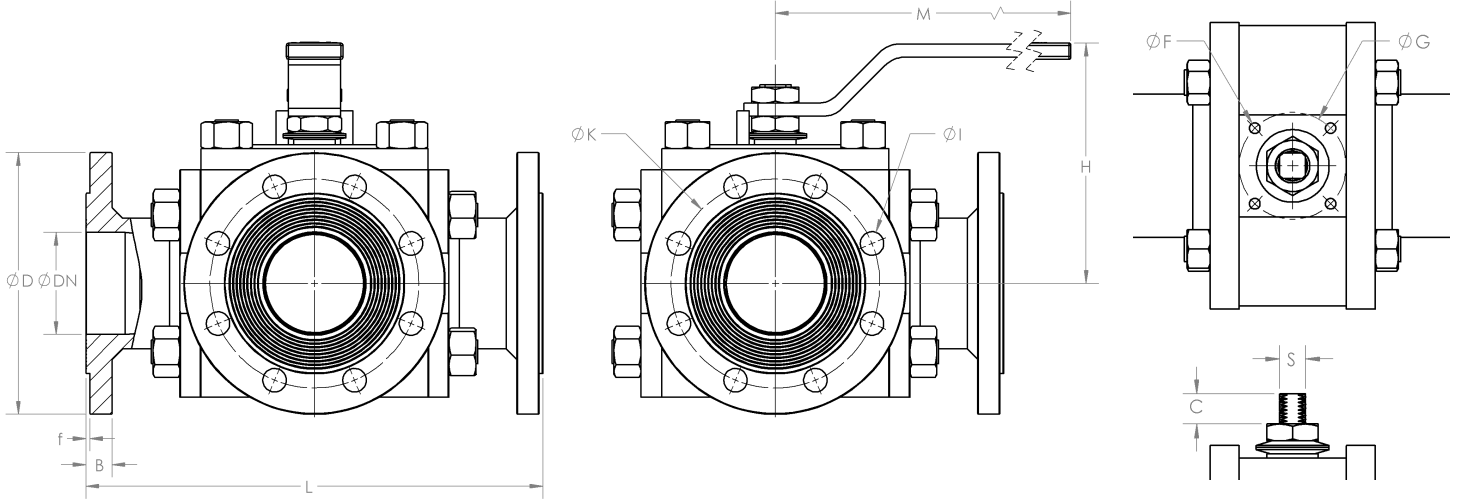

3 YOLLU - T KÜRESEL VANALAR / 3 WAY - T BALL VALVES

STANDART ÖLÇÜLER / STANDARD DIMENSIONS

DN	L	H	M	f	B PN 16 / 40	D	K PN 16 / 40	I PN 16 / 40	ISO 5211	G	F	S	C
15	150	95	140	2	14 / 16	95	65	14	F 3	36	M5	9	11
20	160	100	140	2	16 / 18	105	75	14	F 3	36	M5	9	11
25	180	105	170	2	16 / 18	115	85	14	F 4	42	M5	11	13
32	200	115	170	2	16 / 18	140	100	18	F 4	42	M5	11	13
40	230	130	270	3	16 / 18	150	110	18	F 5	50	M6	14	16
50	290	150	270	3	18 / 20	165	125	18	F 5	50	M6	14	16
65	310	160	350	3	18 / 22	185	145	18	F 7	70	M8	17	19
80	350	175	350	3	20 / 24	200	160	18	F 7	70	M8	17	19
100	400	185	450	3	20 / 24	220 / 235	180 / 190	18 / 22	F 10	102	M10	22	24
125	450	210	550	3	22 / 26	250 / 270	210 / 220	18 / 26	F 12	125	M12	27	29
150	550	240	650	3	22 / 28	285 / 300	240 / 250	22 / 26	F 12	125	M12	27	29
200	650	275	750	3	24 / 34	340 / 375	295 / 320	22 / 26	F 14	140	M16	36	38